



# Recreational Vehicle and Marine Dedicated Faucet Undersink Water Filtration

## Models USF-A and USF-C

Like most people, your concerns about water quality have probably increased over the past few years. Daily, there are news reports on water contaminations. Every time you reach a new location and hook-up to the water supply, you meet a new set of water quality conditions. Therefore, you need a solution that helps address your concerns.

**Systems that filter the drinking water in your galley ... to be sure!  
Having cleaner, good tasting water was never this easy.**



### All Systems:

- Built-in bypass valve for easy winterizing and sanitizing
- Install under the sink with dedicated faucet
- Drinking Water Faucet Included
- Feature our exclusive Sanitary Quick Change Design
- Easy Cartridge Change
- Patented Carbon Block for improved absorption
- Patented Interconnect for ease-of-use and positive sealing
- 6 Month Cartridge Life
- Saves on the cost and storage of bottled water
- Bacteria inhibition built-in

### 3M™ Taste and Odor System (USF-A):

- Provides cleaner, better tasting and smelling water
- Removes > 95% of Chlorine
- Reduces sediment, dirt, rust, sand and silt to 1 micron
- NSF Listed

### 3M Chemical Reduction System (USF-C):

- Minimize concerns over chemical contamination, while improving the taste, smell and clarity of your water supply
- Reduces:
  - Turbidity<sup>1</sup>
  - Parasitic Protozoan Cysts<sup>1</sup>
  - Benzene<sup>1</sup>
  - DiChlorobenzene<sup>1</sup>
  - Toxaphene<sup>1</sup>
  - Lead<sup>1</sup>
  - Mercury<sup>1</sup>
- Reduces sediment, dirt, rust, sand and silt to 0.5 micron
- Removes > 95% of Chlorine



Visit [www.nsf.org](http://www.nsf.org) for the claims associated with products that are NSF listed

<sup>1</sup> As tested in accordance with NSF/ANSI Standard 53

*The Solution for ever-changing water supplies.*



# Dedicated Faucet Undersink Filter Systems

## Physical Specifications:

- Includes a head assembly with integral mounting bracket and bypass valve, and a single cartridge filter.
- Inlet and outlet plumbing connections are 1/4" Push-In.
- System maximum operating pressure of 125 psi (862 kPa) and operating temperature of 100°F (38°C).
- Filter cartridges incorporate carbon block media.
- System is NSF Standard 42 and 53 and/or CFR-21 compliant.
- Cartridges are sanitary in design, requiring no contact with the filter media during cartridge change-out.
- Filter cartridges are ready to use.

EPA Establishment Number 070595-CT-001.




### WARNING

- **Do not use with water that is microbiologically unsafe or of unknown quality without adequate disinfection before or after the system.** Systems certified for cyst reduction may be used on disinfected water that may contain filterable cysts.
- Do not use the system if the filter cartridge has been contaminated with any winterizing chemicals. A new filter cartridge must be installed when opening system for use after winterization.

### CAUTION:

**To reduce the risk associated with property damage due to water leakage:**

- **Read and follow** installation and use instructions.
- **Protect from freezing.** Remove filter cartridge when temperatures are expected to drop below 40° F (4.4° C).
- Install on **COLD** water lines only.
- Follow accepted plumbing practices such as those outlined in the Uniform Plumbing Code.
- Install a pressure limiting device and water hammer arrester for inlet water pressures exceeding 80 psi. (Refer to Uniform Plumbing Code, Sections 608.2 and 609.10)
- Never install or operate where inlet water pressure may exceed 125 psi.
- Replace cartridge every season. Cartridge **MUST** be replaced at least every 12 months.

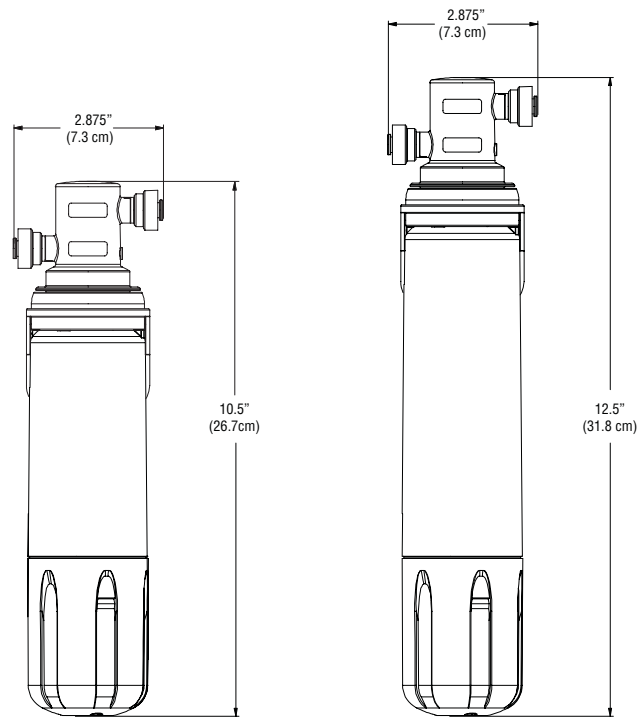

Model Number	Cartridge Included	Capacity	Flow Rate	Sediment	Chlorine	Turbidity <sup>1</sup>	Parasitic Protozoan Cysts <sup>1</sup>	VOC <sup>1</sup>	Lead & Mercury <sup>1</sup>
USF-A	A	500 gal (1,892 lit)	0.5 gpm (1.8 lpm)	1 micron	> 95%	No	No	No	No
USF-C	C	500 gal (1,892 lit)	0.5 gpm (1.8 lpm)	0.5 micron	> 95%	Yes	99.99%	Yes	Yes

USF-A Can Be Upgraded By Changing Cartridge:

Cartridge	Capacity	Flow Rate	Sediment	Chlorine	Turbidity <sup>1</sup>	Parasitic Protozoan Cysts <sup>1</sup>	VOC <sup>1</sup>	Lead & Mercury <sup>1</sup>
A	500 gal (1,892 lit)	0.5 gpm (1.8 lpm)	1 micron	> 95%	No	No	No	No
C	500 gal (1,892 lit)	0.5 gpm (1.8 lpm)	0.5 micron	> 95%	Yes	99.99%	Yes	Yes

<sup>1</sup> As tested in accordance with NSF/ANSI Standard 53

## 3M™ Recreational Vehicle/Marine Filter Systems and Filter Cartridges 5 Year Limited Warranty

3M Company ("3M") warrants its residential recreational vehicle/marine filter systems and filter cartridges ("Product(s)") to be free from defects in material and workmanship during normal use for a period of five (5) years from the date of original purchase. If the Product(s) is (are) defective within this warranty period, your exclusive remedy and 3M's sole obligation shall be, at 3M's option, to replace or repair the Product(s) or refund the original purchase price of the Product(s). This warranty does not apply to failures that result from abuse, misuse, alteration or damage not caused by 3M or failure to properly follow installation and use instructions.

To obtain warranty service, contact 3M at 1-888-724-6326. Proof of purchase (original sales receipt) must accompany all warranty claims, along with a complete description of the product, model number, and defect.

Limitation of Liability. 3M will not be liable for any loss or damage arising from the use of this Product(s), whether direct, indirect, special, incidental, or consequential, regardless of the legal theory asserted, including warranty, contract, negligence or strict liability. Some states do not allow the exclusion or limitation of incidental or consequential damages, so the above limitation may not apply to you.

This warranty gives you specific legal rights and you may have other rights which vary from state to state, or country to country.

Manufactured by CUNO Incorporated, a 3M Company

400 Research Parkway, Meriden CT 06450 • 1-888-724-6326 • 1-203-238-8701 • www.rvmarinewater.com